

## KombiSIGN 50 / Permanent Beacon 846

## Perm. light element 12-230VAC/DC YE





| MECHANICAL DATA             |             |
|-----------------------------|-------------|
| Height                      | 67 mm       |
| Diameter                    | 52 mm       |
| Materials                   | PC          |
| Dome colour                 | Yellow      |
| Protection category         | IP54        |
| Tension relief              | Not present |
| Working temperature minimum | -20°C       |
| Working temperature maximum | +50°C       |
| Weight with packaging       | 50 g        |
| Product weight              | 40 g        |

| ELECTRICAL DATA        |                          |
|------------------------|--------------------------|
| Operating voltage      | 12-230V                  |
| Operating voltage type | AC/DC                    |
| Protection class       | Protection class 2       |
| Pollution degree       | 3                        |
| Overvoltage category   | II                       |
| Isolation voltage      | Ui = 250V; Uimp = 2.500V |
| Power illuminant       | max. 5W                  |

| OPTICAL DATA         |                 |
|----------------------|-----------------|
| Light colour         | Yellow          |
| Service life optical | depends on bulb |
| Lamp fitting/socket  | B15d            |

| APPROVAL DATA                 |                       |
|-------------------------------|-----------------------|
| Conforms with CE              | Yes                   |
| Conforms with RoHS directive  | Yes                   |
| WEEE                          | Yes                   |
| Conforms with ATEX-directive  | No                    |
| Conforms with CCC             | No                    |
| Conforms with UL              | cULus                 |
| UL Type Rating                | Type 12               |
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | Yes                   |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM            | No                    |
| Conforms with AS-I            | No                    |


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



## KombiSIGN 50 / Permanent Beacon 846

## Perm. light element 12-230VAC/DC YE

| ICAO Certification    | No |
|-----------------------|----|
| Conforms with DNV     | No |
| Conforms with RoHS CN | No |
| Conforms with VdS     | No |

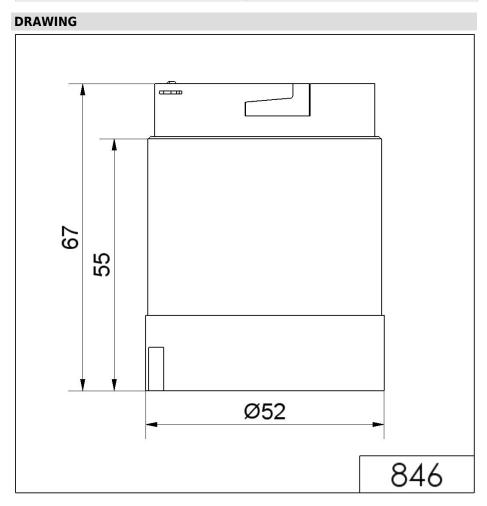

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.