## KombiSIGN 50 / Permanent Beacon 846 Perm. light element 12-230VAC/DC BU



ļ

Part No.:	846.500.00		
Series:	KombiSIGN 50		
MECHANICAL DATA			
Height		67 mm	
Diameter		52 mm	
Materials		PC	
Dome colour		Blue	
Protection category		IP54	
Tension relief		Not present	
Working temperature minimum		-20°C	
Working temperature maximum		+50°C	
Weight with packaging		51 g	
Product weight		40 g	
ELECTRIC			
Operating voltage		12-230V	
Operating voltage type		AC/DC	
Protection class		Protection class 2	
Pollution degree		3	
Overvoltage category		-	
Isolation voltage		Ui = 250V; Uimp = 2.500V	
Power illuminant		max. 5W	
OPTICAL I	DATA		
Light colou		Blue	
Service life optical		depends on bulb	
Lamp fitting/socket		B15d	
APPROVAL DATA		Ma a	
Conforms with CE		Yes	
Conforms with RoHS directive		Yes	
WEEE		Yes	
Conforms with ATEX-directive		No	
Conforms with CCC		No	
Conforms with UL		cULus	
UL Type Rating		Type 12	
Conforms with FCC		No	
Conforms with IC		No	
EAC certificate available		Yes	
Conforms with UKCA (Importer)		Yes (WERMA (UK) Ltd.)	
Conforms with CMIM		No	
Conforms w	with AS-I	No	


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

## KombiSIGN 50 / Permanent Beacon 846 Perm. light element 12-230VAC/DC BU

ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

## DRAWING

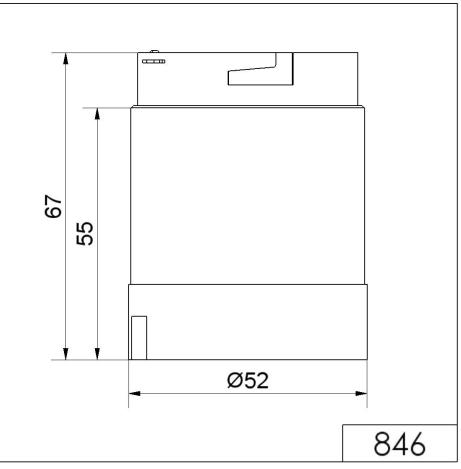

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.