

Mini / LED/Horn 424

LED Horn WM Contin. tone 24VAC/DC RD

Part No.: 424.120.75





MECHANICAL DATA		
Height	235 mm	
Diameter	83 mm	
Materials	PC	
Dome colour	Red	
Housing colour	Grey	
Protection category	IP65	
Connection	Screw terminals	
cross-sectional area maximum	1,50mm ² / 16AWG	
Cable entry	Membrane grommet	
Cable entry minimum	d = 1 mm	
Cable entry maximum	d = 9 mm	
Tension relief	Pull-out protection	
Type of fixing	Wall mounting	
Working temperature minimum	-20°C	
Working temperature maximum	+50°C	
Weight with packaging	223 g	
Product weight	166 g	

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	80 mA	
Rated inrush current	2.000 mA	
Protection class	Protection class 2	
Pollution degree	3	

OPTICAL DATA	
Light source	LED
Light colour	Red
Optical signal image	Permanent
Service life optical	50,000 h maximum

ACOUSTIC DATA		
Volume (max) at 1m distance	98,0 dB (A)	
Acoustic signal image	Continuous tone	
Audio frequency	110 Hz	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Mini / LED/Horn 424

LED Horn WM Contin. tone 24VAC/DC RD


Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Mini / LED/Horn 424

LED Horn WM Contin. tone 24VAC/DC RD

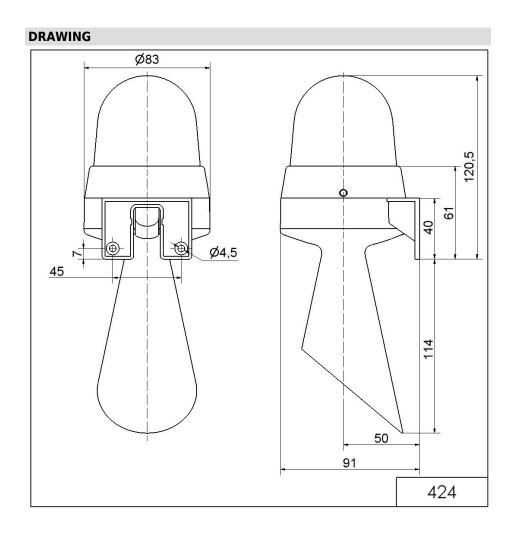

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.