

## Permanent Light 800 / Accessories Surface housing 1-fold GY




## Part No.: 975.815.03

| MECHANICAL DATA               |                                |
|-------------------------------|--------------------------------|
| Length                        | 107 mm                         |
| Width                         | 82 mm                          |
| Height                        | 55 mm                          |
| Materials                     | ABS                            |
| Housing colour                | Grey                           |
| Protection category           | IP65                           |
| Weight with packaging         | 135 g                          |
| Product weight                | 135 g                          |
| ELECTRICAL DATA               |                                |
| Operating voltage type        | AC                             |
| APPROVAL DATA                 |                                |
| Conforms with RoHS directive  | Fulfills substance restriction |
| WEEE                          | No                             |
| Conforms with ATEX-directive  | No                             |
| Conforms with CCC             | No                             |
| Conforms with UL              | No                             |
| Conforms with FCC             | No                             |
| Conforms with IC              | No                             |
| EAC certificate available     | No                             |
| Conforms with UKCA (Importer) | No                             |
| Conforms with CMIM            | No                             |
| Conforms with AS-I            | No                             |
| ICAO Certification            | No                             |
| Conforms with DNV             | No                             |
| Conforms with RoHS CN         | No                             |

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

Permanent Light 800 / Accessories
Surface housing 1-fold GY

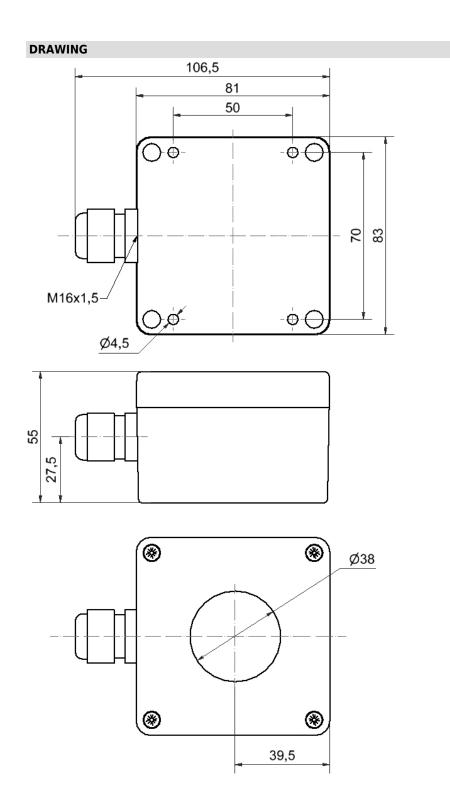

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.