

Signal tower / Pre-assembled Signal Tower

AndonLIGHT KS71 GN/YE/RD



Part No.: 649.260.01 Series: KombiSIGN 71

| MECHANICAL DATA | |
|------------------------------|-----------------------------|
| Height | 299 mm |
| Diameter | 70 mm |
| Materials | PA-GF PC |
| Dome colour | Green Red Yellow |
| Housing colour | Black |
| Protection category | IP30 |
| Connection | Spring-type terminal |
| cross-sectional area maximum | 1,50mm ² / 16AWG |
| Cable entry | Through hole |
| Cable entry maximum | d = 11 mm |
| Tension relief | Not present |
| Type of fixing | Tube mounting |
| Working temperature minimum | 0°C |
| Working temperature maximum | +40°C |
| Weight with packaging | 1058 g |
| Product weight | 944 g |

| ELECTRICAL DATA | |
|-----------------------------|------------------------------|
| Operating voltage | 115-230V |
| Operating voltage type | AC |
| Operating voltage frequency | 50Hz at 230V 60Hz at 115V |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 230 VAC |
| Rated operational current | 40 mA |
| Rated inrush current | >10A |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |

| OPTICAL DATA | |
|----------------------|------------------------|
| Light source | LED |
| Light colour | Green Red Yellow |
| Optical signal image | Permanent |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Signal tower / Pre-assembled Signal Tower

AndonLIGHT KS71 GN/YE/RD


| Service life optical | 50,000 h minimum |
|------------------------------|--------------------------------|
| APPROVAL DATA | |
| Conforms with CE | No |
| Conforms with RoHS directive | Fulfills substance restriction |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | No |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Signal tower / Pre-assembled Signal Tower

AndonLIGHT KS71 GN/YE/RD



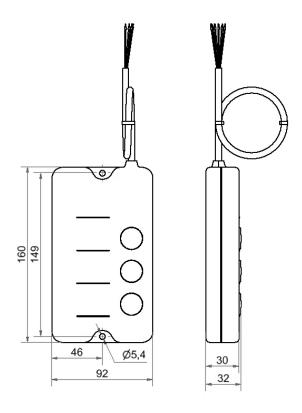

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.