

#### Completely pre-assembled Signal Towers / eSIGN

## eSIGN 15 Segments BK



| Part No.: | 657.500.55 |
|-----------|------------|
| Series:   | eSIGN      |

| MECHANICAL DATA             |                             |
|-----------------------------|-----------------------------|
| Height                      | 372 mm                      |
| Diameter                    | 72 mm                       |
| Materials                   | PC                          |
| Dome colour                 | Tranclucent                 |
| Housing colour              | Black                       |
| Protection category         | IP66<br>IP69K               |
| Connection                  | M12 plug 8-pole             |
| Type of fixing              | Base mounting Tube mounting |
| Working temperature minimum | -30°C                       |
| Working temperature maximum | +60°C                       |
| Weight with packaging       | 850 g                       |
| Product weight              | 794 g                       |
| IK-Code (IEC 62262)         | IK08                        |

| ELECTRICAL DATA             |                         |
|-----------------------------|-------------------------|
| Operating voltage           | 24V                     |
| Operating voltage type      | DC                      |
| Operating voltage tolerance | +/- 10%                 |
| Rated operational voltage   | 24 VDC                  |
| Rated operational current   | 555 mA                  |
| Rated inrush current        | 800 mA                  |
| Protection class            | Protection class 3      |
| Pollution degree            | 3                       |
| Overvoltage category        | I                       |
| Isolation voltage           | Ui = 50V / Uimp = 330V  |
| Request to external PSU     | SELV/PELV               |
| connectivity                | Digital entrance<br>USB |

| OPTICAL DATA         |   |
|----------------------|---|
| Light source         | LED   |
| Light colour         | MC >1.000.000 colours                                     |
| Optical signal image | Blink Double flash Flash Permanent Revolving Triple flash |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



#### Completely pre-assembled Signal Towers / eSIGN

# eSIGN 15 Segments BK

| Blink frequency      | Configurable     |
|----------------------|------------------|
| Service life optical | 50,000 h maximum |


| APPROVAL DATA                 |                       |
|-------------------------------|-----------------------|
| Conforms with CE              | Yes                   |
| Conforms with RoHS directive  | Yes                   |
| WEEE                          | Yes                   |
| Conforms with ATEX-directive  | No                    |
| Conforms with CCC-Ex          | No                    |
| Conforms with CCC             | No                    |
| Conforms with UL              | cULus                 |
| UL Type Rating                | Type 4/4X/12/13       |
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | No                    |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM            | No                    |
| Conforms with AS-I            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | No                    |
| Conforms with VdS             | No                    |
| MTTF-value [years]            | 33                    |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / eSIGN

### eSIGN 15 Segments BK

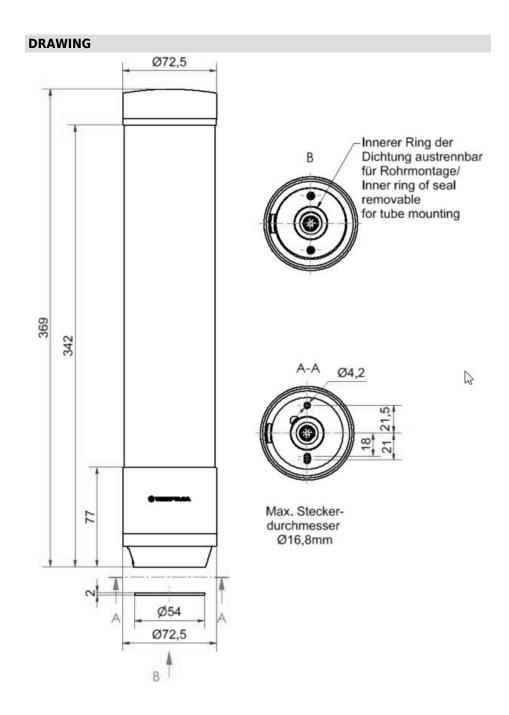

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.