

Heavy-Duty Beacons / LED Rotating Beacon

LED Rotating Beacon BM 115-230VAC YE



Part No.: 839.320.68







MECHANICAL DATA		
Height	189 mm	
Diameter	153 mm	
Materials	Aluminium PC	
Dome colour	Yellow	
Housing colour	Black	
Protection category	IP66 IP67	
Connection	Screw terminals	
cross-sectional area maximum	1,50mm² / 16AWG	
Cable entry	Screwed cable gland	
Cable entry minimum	d = 6 mm	
Cable entry maximum	d = 13 mm	
Tension relief	Present (conforms to VDE)	
Type of fixing	Base mounting	
Working temperature minimum	-30°C	
Working temperature maximum	+50°C	
Weight with packaging	1583 g	
Product weight	1281 g	

ELECTRICAL DATA	
Operating voltage	115-230V
Operating voltage type	AC
Operating voltage frequency	50Hz at 230V 60Hz at 115V
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	180 mA
Rated inrush current	500 mA
Protection class	Protection class 1
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V

OPTICAL DATA	
Light source	LED
Light colour	Yellow
Optical signal image	Revolving
Service life optical	50,000 h maximum

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Heavy-Duty Beacons / LED Rotating Beacon

LED Rotating Beacon BM 115-230VAC YE


Rotation speed (rpm)	180 U/min
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	Yes
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Heavy-Duty Beacons / LED Rotating Beacon

LED Rotating Beacon BM 115-230VAC YE

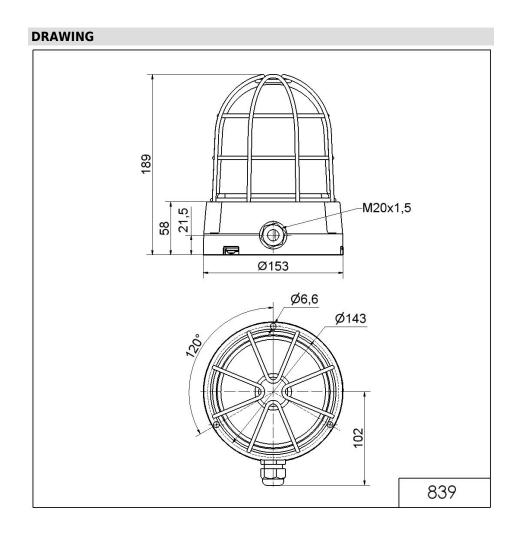

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.