

KombiSIGN 50 / Buzzer Devices 849

# Buzzer element contin/pulse 230VAC BK



|           |              |
|-----------|--------------|
| Part No.: | 849.000.68   |
| Series:   | KombiSIGN 50 |



## MECHANICAL DATA

|                             |       |
|-----------------------------|-------|
| Height                      | 72 mm |
| Diameter                    | 52 mm |
| Materials                   | PC    |
| Housing colour              | Black |
| Protection category         | IP54  |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging       | 64 g  |
| Product weight              | 53 g  |

## ELECTRICAL DATA

|                             |                          |
|-----------------------------|--------------------------|
| Operating voltage           | 230V                     |
| Operating voltage type      | AC                       |
| Operating voltage frequency | 50Hz                     |
| Operating voltage tolerance | +/- 10%                  |
| Rated operational voltage   | 230 VAC                  |
| Rated operational current   | 35 mA                    |
| Rated inrush current        | 450 mA                   |
| Protection class            | Protection class 2       |
| Pollution degree            | 3                        |
| Overvoltage category        | II                       |
| Isolation voltage           | Ui = 250V; Uimp = 2.500V |

## ACOUSTIC DATA

|                             |                               |
|-----------------------------|-------------------------------|
| Volume (max) at 1m distance | 85,0 dB (A)                   |
| Acoustic signal image       | Continuous tone<br>Pulse tone |
| Audio frequency             | 2500 Hz                       |
| Acoustic service life       | 5,000 h minimum               |

## APPROVAL DATA

|                              |         |
|------------------------------|---------|
| Conforms with CE             | Yes     |
| Conforms with RoHS directive | Yes     |
| WEEE                         | Yes     |
| Conforms with ATEX-directive | No      |
| Conforms with CCC            | No      |
| Conforms with UL             | cULus   |
| UL Type Rating               | Type 12 |
| Conforms with FCC            | No      |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / Buzzer Devices 849

## Buzzer element contin/pulse 230VAC BK

|                               |                       |
|-------------------------------|-----------------------|
| Conforms with IC              | No                    |
| EAC certificate available     | Yes                   |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM            | No                    |
| Conforms with AS-I            | No                    |
| ICAO Certification            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | No                    |
| Conforms with VdS             | No                    |

### DRAWING

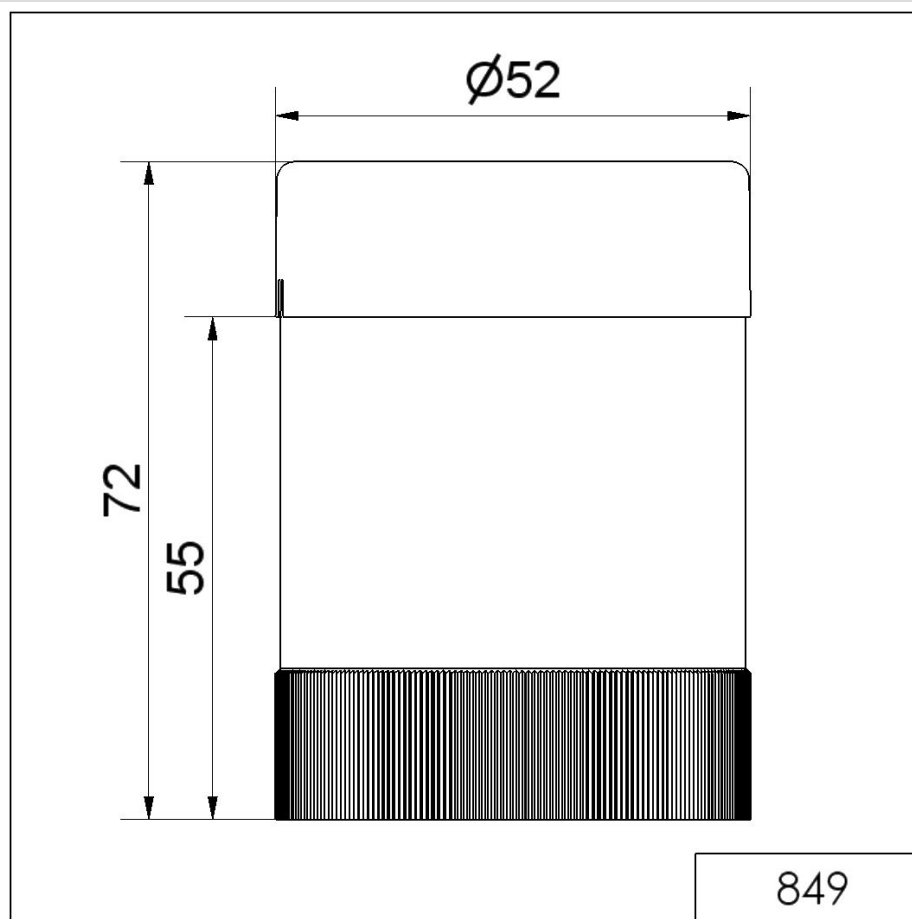

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.